




Pin	定义	01	LEK
1	GND	02	LEDA
2	VCC	03	GND
3	RST	04	VCC
4	SCL	05	R0
5	SDA	06	R1
6	INT	07	R2
		08	R3
		09	R4
		10	R5
		11	R6
		12	R7
		13	G0
		14	G1
		15	G2
		16	G3
		17	G4
		18	G5
		19	G6
		20	G7
		21	B0
		22	B1
		23	B2
		24	B3
		25	B4
		26	B5
		27	B6
		28	B7
		29	GND
		30	POLK
		31	NC
		32	HSN0
		33	VSNC
		34	DE
		35	NC
		36	GND
		37	SCL
		38	SDI
		39	CS
		40	RESET

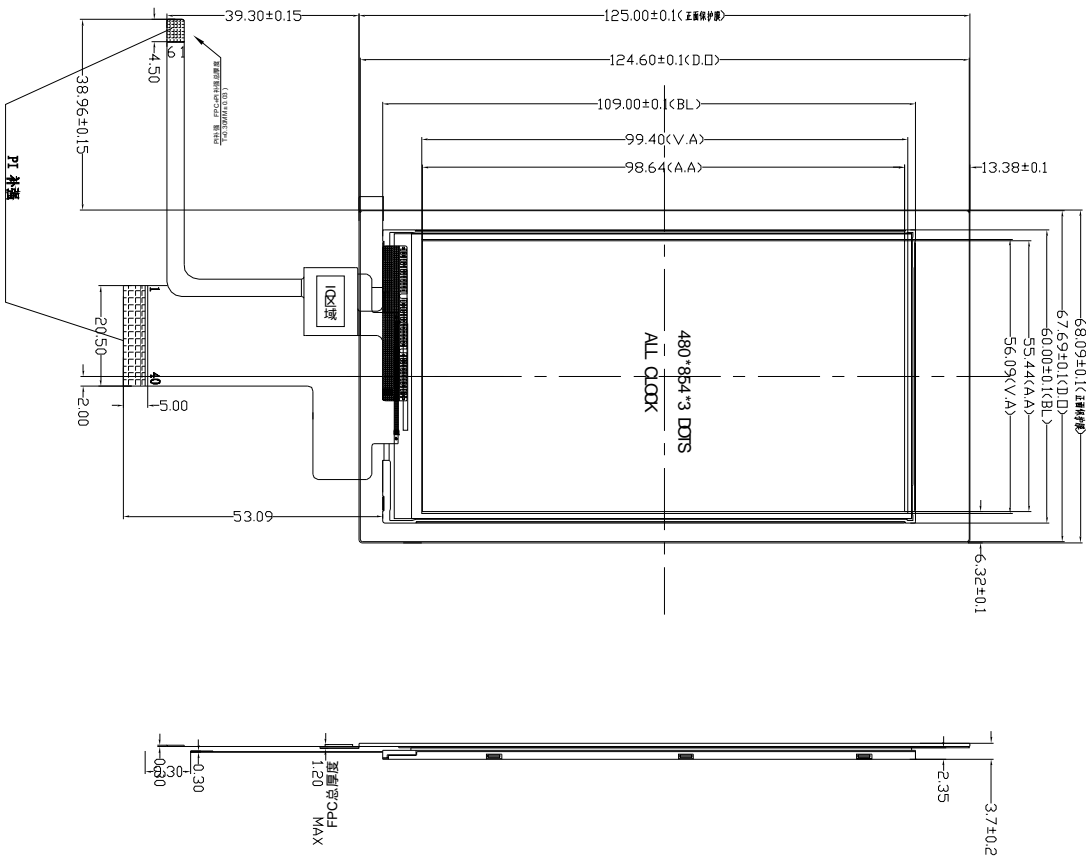

LED CIRCUIT DIAGRAM:

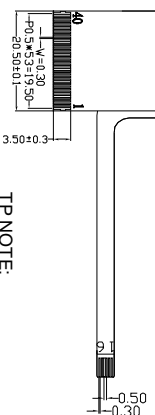

TP NOTE:

1. 工作电压:DC2.8~3.6V
2. 盖板材质:钢化玻璃
3. 透光率: 85%
4. 工作环境:温度:20 ~60 ,湿度20%~90%
5. 储存环境:温度:30 ~70 ,湿度20%~90%
6. 备注公差:±0.20
7. IC方案 :Focalltech/FT 5336 双Filin点

- NOTES:
1. Display Type: 262K TFT, TRANSMISSIVE;
 2. Backlight: 10-chips LED, series;
 3. View Direction: any angle;
 4. Driver IC: ILI9806
 5. General Tolerance: ± 0.3;
 6. Recommended Case Open Area should be less than Module V.A.;
 7. Recommended Connector:
 8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

DRAWN BY:	HP-450003-V1	SCALE:	1:1
CHECK BY:		MATERIAL:	
UNIT:	mm	TOLERANCE:	± 0.2
PAGE:	1 of 1		